

# Texas MUTCD

# Part

## Signs



2006



**PART 2. SIGNS**  
**TABLE OF CONTENTS**

<u>SECTIONS</u>	<u>Page</u>
<b>CHAPTER 2A. GENERAL</b>	
Section 2A.01	Function and Purpose of Signs .....2A-1
Section 2A.02	Definitions .....2A-1
Section 2A.03	Standardization of Application.....2A-1
Section 2A.04	Excessive Use of Signs .....2A-1
Section 2A.05	Classification of Signs .....2A-2
Section 2A.06	Design of Signs .....2A-2
Section 2A.07	Changeable Message Signs .....2A-2
Section 2A.08	Retroreflectivity and Illumination.....2A-3
Section 2A.09	Maintaining Minimum Retroreflectivity.....2A-5
Section 2A.10	Shapes .....2A-7
Section 2A.11	Sign Colors.....2A-7
Section 2A.12	Dimensions.....2A-7
Section 2A.13	Symbols.....2A-9
Section 2A.14	Word Messages .....2A-9
Section 2A.15	Sign Borders.....2A-9
Section 2A.16	Standardization of Location .....2A-10
Section 2A.17	Overhead Sign Installations .....2A-13
Section 2A.18	Mounting Height .....2A-13
Section 2A.19	Lateral Offset .....2A-14
Section 2A.20	Orientation.....2A-14
Section 2A.21	Posts and Mountings .....2A-15
Section 2A.22	Maintenance .....2A-15
Section 2A.23	Median Opening Treatments for Divided Highways with Wide Medians .....2A-15
<b>CHAPTER 2B. REGULATORY SIGNS</b>	
Section 2B.01	Application of Regulatory Signs .....2B-1
Section 2B.02	Design of Regulatory Signs .....2B-1
Section 2B.03	Size of Regulatory Signs.....2B-1
Section 2B.04	STOP Sign (R1-1) .....2B-1
Section 2B.04A	CROSS TRAFFIC DOES NOT STOP Plaque (R1-5b).....2B-2
Section 2B.05	STOP Sign Applications.....2B-2
Section 2B.06	STOP Sign Placement .....2B-3
Section 2B.07	Multiway Stop Applications.....2B-3
Section 2B.08	YIELD Sign (R1-2).....2B-4
Section 2B.09	YIELD Sign Applications .....2B-4
Section 2B.09A	TO RAMP Plaque (R1-2a).....2B-4
Section 2B.09B	TO ONCOMING TRAFFIC Sign (R1-2b).....2B-5
Section 2B.10	YIELD Sign Placement.....2B-5
Section 2B.11	Yield Here To Pedestrians Signs (R1-5, R1-5a) .....2B-6
Section 2B.12	In-Street Pedestrian Crossing Signs (R1-6) .....2B-6
Section 2B.13	Speed Limit Sign (R2-1) .....2B-7
Section 2B.14	Truck Speed Limit Signs (R2-2, R2-2a) .....2B-7
Section 2B.15	Night Speed Limit Sign (R2-3).....2B-7
Section 2B.16	Minimum Speed Limit Sign (R2-4) .....2B-9

Section 2B.16A	MAXIMUM LEGAL SPEEDS Sign (R2-4TC).....	2B-9
Section 2B.17	Fines Higher Plaques (R2-6, R2-6a, R2-6c).....	2B-9
Section 2B.18	Location of Speed Limit Signs.....	2B-9
Section 2B.19	Turn Prohibition Signs (R3-1 through R3-4a).....	2B-10
Section 2B.20	Intersection Lane Control Signs (R3-5 through R3-8).....	2B-10
Section 2B.21	Mandatory Movement Lane Control Signs (R3-5, R3-5a, and R3-7).....	2B-12
Section 2B.21A	LEFT LANE MUST ENTER RAMP Sign (R3-20).....	2B-12
Section 2B.21B	RIGHT (LEFT) LANE MUST EXIT Sign (R3-21).....	2B-12
Section 2B.21C	ALL TRAFFIC MUST EXIT Sign (R3-22).....	2B-13
Section 2B.22	Optional Movement Lane Control Sign (R3-6).....	2B-13
Section 2B.23	Advance Intersection Lane Control Signs (R3-8 Series).....	2B-13
Section 2B.23A	TURNAROUND ONLY Sign (R3-8U).....	2B-13
Section 2B.24	Two-Way Left Turn Only Signs (R3-9a, R3-9b, R3-9 BEGIN, R3-9 END).....	2B-13
Section 2B.25	Reversible Lane Control Signs (R3-9d, R3-9f through R3-9i).....	2B-14
Section 2B.26	Preferential Only Lane Signs (R3-10 through R3-15).....	2B-17
Section 2B.27	Preferential Only Lanes for High-Occupancy Vehicles (HOVs).....	2B-20
Section 2B.28	Preferential Only Lane Sign Applications and Placement.....	2B-22
Section 2B.29	DO NOT PASS Sign (R4-1).....	2B-24
Section 2B.30	PASS WITH CARE Sign (R4-2).....	2B-24
Section 2B.30A	LEFT LANE FOR PASSING ONLY Sign (R4-2a).....	2B-25
Section 2B.31	SLOWER TRAFFIC KEEP RIGHT Sign (R4-3).....	2B-25
Section 2B.31A	DO NOT DRIVE ON SHOULDER Sign (R4-3a).....	2B-25
Section 2B.31B	DO NOT CROSS DOUBLE WHITE LINE Sign (R4-3b).....	2B-25
Section 2B.31C	DO NOT CHANGE LANES Sign (R4-3c).....	2B-25
Section 2B.31D	SHOULDER LANE USE OK Sign (R4-3d).....	2B-25
Section 2B.32	DELETED.....	2B-26
Section 2B.32A	NO TRUCKS LEFT LANE SIGNS (R4-5a, R4-5b, R4-5c).....	2B-26
Section 2B.33	Keep Right and Keep Left Signs (R4-7, R4-8).....	2B-26
Section 2B.34	DO NOT ENTER Sign (R5-1).....	2B-26
Section 2B.34A	RAMP Sign (R5-1T).....	2B-27
Section 2B.35	WRONG WAY Sign (R5-1a).....	2B-28
Section 2B.36	Selective Exclusion Signs.....	2B-28
Section 2B.37	ONE WAY Signs (R6-1, R6-2).....	2B-29
Section 2B.38	Divided Highway Crossing Signs (R6-3, R6-3a).....	2B-36
Section 2B.39	Parking, Standing, and Stopping Signs (R7 and R8 Series).....	2B-36
Section 2B.40	Design of Parking, Standing, and Stopping Signs.....	2B-36
Section 2B.41	Placement of Parking, Stopping, and Standing Signs.....	2B-37
Section 2B.41A	Placement of Handicapped Parking Signs.....	2B-39
Section 2B.42	Emergency Restriction Signs (R8-4, R8-7, R8-8).....	2B-40
Section 2B.43	WALK ON LEFT FACING TRAFFIC and No Hitchhiking Signs (R9-1, R9-4, R9-4a).....	2B-40
Section 2B.44	Pedestrian Crossing Signs (R9-2, R9-3).....	2B-40
Section 2B.45	Traffic Signal Signs (R10-1 through R10-21).....	2B-42
Section 2B.46	Photo Enforced Signs (R10-18, R10-19).....	2B-44
Section 2B.47	KEEP OFF MEDIAN Sign (R11-1).....	2B-44
Section 2B.48	ROAD CLOSED Sign (R11-2) and LOCAL TRAFFIC ONLY Signs (R11-3 Series, R11-4).....	2B-44
Section 2B.49	Weight Limit Signs (R12-1 through R12-5).....	2B-46
Section 2B.49A	WIDTH LIMIT Signs (R12-9, R12-9a).....	2B-47
Section 2B.50	Weigh Station Signs (R13 Series).....	2B-47
Section 2B.50A	ALL TRUCKS MUST STOP AHEAD Sign (when folded- STATION CLOSED) (R13-1Ta).....	2B-47
Section 2B.50B	ALL TRUCKS STOP AHEAD WHEN FLASHING Sign (R13-1a).....	2B-48
Section 2B.51	TRUCK ROUTE Sign (R14-1).....	2B-49
Section 2B.52	Hazardous Cargo Signs (R14-2, R14-3).....	2B-49

Section 2B.52A	HAZARDOUS CARGO MUST FOLLOW Sign (R14-6).....	2B-49
Section 2B.53	DELETED .....	2B-49
Section 2B.53A	TRAFFIC FINES DOUBLE Sign (R20-5).....	2B-49
Section 2B.54	Other Regulatory Signs .....	2B-50

## **CHAPTER 2C. WARNING SIGNS**

Section 2C.01	Function of Warning Signs.....	2C-1
Section 2C.02	Application of Warning Signs .....	2C-1
Section 2C.03	Design of Warning Signs.....	2C-1
Section 2C.04	Size of Warning Signs .....	2C-1
Section 2C.05	Placement of Warning Signs .....	2C-1
Section 2C.06	Horizontal Alignment Signs (W1-1 through W1-5, W1-11, W1-11T W1-15T) .....	2C-2
Section 2C.07	DELETED .....	2C-3
Section 2C.08	DELETED .....	2C-3
Section 2C.09	One-Direction Large Arrow Signs (W1-6, W1-9) .....	2C-3
Section 2C.10	Chevron Alignment Sign (W1-8).....	2C-3
Section 2C.11	Truck Rollover Warning Sign (W1-13).....	2C-4
Section 2C.12	Hill Signs (W7-1, W7-1a, W7-1b).....	2C-4
Section 2C.13	Truck Escape Ramp Signs (W7-4, W7-4b, W7-4c).....	2C-6
Section 2C.14	HILL BLOCKS VIEW Sign (W7-6).....	2C-7
Section 2C.15	ROAD NARROWS Sign (W5-1) .....	2C-7
Section 2C.16	NARROW BRIDGE Sign (W5-2).....	2C-7
Section 2C.16A	LOAD ZONED BRIDGE Sign (W12-5).....	2C-8
Section 2C.17	ONE LANE BRIDGE Sign (W5-3).....	2C-8
Section 2C.18	Divided Highway (Road) Sign (W6-1).....	2C-8
Section 2C.19	Divided Highway (Road) Ends Sign (W6-2).....	2C-8
Section 2C.20	Double Arrow Sign (W12-1).....	2C-8
Section 2C.21	DEAD END/NO OUTLET and ROAD ENDS Signs (W14-1, W14-1T, W14-1p, W14-2, W14-2p).....	2C-9
Section 2C.22	Low Clearance Signs (W12-2, W12-3T) .....	2C-11
Section 2C.23	BUMP and DIP Signs (W8-1, W8-2).....	2C-12
Section 2C.24	SPEED HUMP Sign (W17-1).....	2C-12
Section 2C.25	PAVEMENT ENDS Sign (W8-3) .....	2C-12
Section 2C.26	Shoulder Signs (W8-4, W8-4T, W8-9, and W8-9a).....	2C-12
Section 2C.27	SLOW DOWN ON WET ROAD (W8-5a).....	2C-14
Section 2C.28	WATCH FOR ICE ON BRIDGE Sign (W19-2).....	2C-14
Section 2C.28A	Additional Roadway Condition Signs .....	2C-14
Section 2C.29	Advance Traffic Control Signs (W3-1, W3-2, W3-3, W20-7b) .....	2C-15
Section 2C.30	Speed Reduction Sign (W3-5) .....	2C-16
Section 2C.31	Merge Signs (W4-1, W4-1a).....	2C-16
Section 2C.32	Added Lane Sign (W4-3).....	2C-17
Section 2C.33	Lane Ends Signs (W9-1, W9-2).....	2C-17
Section 2C.34	Two-Way Traffic Sign (W6-3) .....	2C-17
Section 2C.34A	END FREEWAY (X) MILE Sign (W6-4a).....	2C-19
Section 2C.35	NO PASSING ZONE Sign (W14-3).....	2C-19
Section 2C.36	Advisory Exit, Ramp, and Curve Speed Signs (W13-2, W13-3, W13-5).....	2C-19
Section 2C.36A	ON RAMP Plaque (W13-4) .....	2C-20
Section 2C.37	Intersection Warning Signs (W2-1 through W2-6).....	2C-20
Section 2C.37A	Highway Intersection Sign (W2-6A) .....	2C-20
Section 2C.37B	TRAFFIC ISLANDS AHEAD Sign (W2-8) .....	2C-20
Section 2C.38	Two-Direction Large Arrow Sign (W1-7).....	2C-20
Section 2C.39	DELETED .....	2C-21

Section 2C.40	Vehicular Traffic Signs (W8-6, W11-1, W11-5a, W11-6, W11-8, W11-10, W11-11, W11-11T, W11-12p, W11-14).....	2C-21
Section 2C.41	Nonvehicular Signs (W11-2, W11-3, W11-4, W11-6, W11-7, W11-9).....	2C-22
Section 2C.42	Playground Sign (W15-1) .....	2C-23
Section 2C.43	Use of Supplemental Plaques.....	2C-23
Section 2C.44	Design of Supplemental Plaques.....	2C-23
Section 2C.45	Distance Plaques (W16-2, W16-3a, W16-4, W7-3a).....	2C-23
Section 2C.46	Advisory Speed Plaque (W13-1) .....	2C-23
Section 2C.47	Supplemental Arrow Plaques (W16-5p, W16-6p, W16-7p).....	2C-24
Section 2C.48	Hill-Related Plaques (W7-2 Series, W7-3 Series).....	2C-24
Section 2C.49	Advance Street Name Plaque (W16-8, W16-8a).....	2C-24
Section 2C.50	CROSS TRAFFIC DOES NOT STOP Plaques (W4-4 series).....	2C-24
Section 2C.51	SHARE THE ROAD Plaque (W16-1).....	2C-24
Section 2C.52	High-Occupancy Vehicle (HOV) Plaque (W16-11).....	2C-24
Section 2C.53	PHOTO ENFORCED Plaque (W16-10).....	2C-25
Section 2C.54	Other Warning Signs .....	2C-25

## **CHAPTER 2D. GUIDE SIGNS—CONVENTIONAL ROADS**

Section 2D.01	Scope of Conventional Road Guide Sign Standards .....	2D-1
Section 2D.02	Application.....	2D-1
Section 2D.03	Color, Retroreflection, and Illumination.....	2D-1
Section 2D.04	Size of Signs.....	2D-1
Section 2D.05	Lettering Style.....	2D-2
Section 2D.06	Size of Lettering.....	2D-2
Section 2D.07	Amount of Legend .....	2D-3
Section 2D.08	Arrows.....	2D-3
Section 2D.09	Numbered Highway Systems.....	2D-4
Section 2D.10	Route Signs and Auxiliary Signs .....	2D-4
Section 2D.11	Design of Route Signs .....	2D-4
Section 2D.12	Design of Route Sign Auxiliaries .....	2D-6
Section 2D.13	Junction Auxiliary Sign (M2-1).....	2D-6
Section 2D.14	Combination Junction Sign (M2-2) .....	2D-6
Section 2D.15	Cardinal Direction Auxiliary Signs (M3-1 through M3-4) .....	2D-7
Section 2D.16	Auxiliary Signs for Alternative Routes (M4 Series) .....	2D-7
Section 2D.17	ALTERNATE Auxiliary Signs (M4-1, M4-1a) .....	2D-8
Section 2D.18	BY-PASS Auxiliary Sign (M4-2).....	2D-8
Section 2D.19	BUSINESS Auxiliary Sign (M4-3).....	2D-8
Section 2D.20	TRUCK Auxiliary Sign (M4-4).....	2D-8
Section 2D.21	TO Auxiliary Sign (M4-5) .....	2D-8
Section 2D.22	END Auxiliary Sign (M4-6) .....	2D-8
Section 2D.23	TEMPORARY Auxiliary Signs (M4-7).....	2D-8
Section 2D.24	Temporary Detour and Auxiliary Signs.....	2D-9
Section 2D.25	Advance Turn Arrow Auxiliary Signs (M5-1, M5-2).....	2D-9
Section 2D.26	Directional Arrow Auxiliary Signs (M6 Series).....	2D-9
Section 2D.27	Route Sign Assemblies.....	2D-9
Section 2D.28	Junction Assembly .....	2D-9
Section 2D.29	Advance Route Turn Assembly .....	2D-10
Section 2D.30	Directional Assembly.....	2D-14
Section 2D.31	Confirming or Reassurance Assemblies .....	2D-14
Section 2D.32	Trailblazer Assembly.....	2D-15
Section 2D.33	Destination and Distance Signs .....	2D-15
Section 2D.34	Destination Signs (D1 Series).....	2D-15

Section 2D.35	Location of Destination Signs.....	2D-17
Section 2D.36	Distance Signs (D2 Series) .....	2D-17
Section 2D.37	Location of Distance Signs .....	2D-17
Section 2D.38	Street Name Sign (D3-1) .....	2D-18
Section 2D.39	Advance Street Name Signs (D3-2).....	2D-18
Section 2D.40	Parking Area Sign (D4-1) .....	2D-20
Section 2D.41	PARK & RIDE Sign (D4-2) .....	2D-20
Section 2D.42	Roadside Park Area Signs (D5 Series) .....	2D-20
Section 2D.43	Scenic Area Signs (D6 Series).....	2D-21
Section 2D.44	DELETED.....	2D-21
Section 2D.44A	Weigh Station Signing (D8 Series).....	2D-21
Section 2D.44B	Inspection Station Signing (D8 Series).....	2D-21
Section 2D.45	General Service Signs (D9 Series).....	2D-22
Section 2D.46	Reference Location Signs (D10-1 through D10-3) and Intermediate Reference Location Signs (D10-1a through D10-3a).....	2D-24
Section 2D.47	Traffic Signal Speed Sign (I1-1).....	2D-27
Section 2D.48	General Information Signs (I Series).....	2D-27
Section 2D.49	Signing of Named Highways.....	2D-28
Section 2D.50	Trail Signs .....	2D-28
Section 2D.51	Crossover Signs (D13 Series).....	2D-30
 <b>CHAPTER 2E. GUIDE SIGNS—FREEWAYS AND EXPRESSWAYS</b>		
Section 2E.01	Scope of Freeway and Expressway Guide Sign Standards.....	2E-1
Section 2E.02	Freeway and Expressway Signing Principles.....	2E-1
Section 2E.02A	Freeway and Expressway Sign Design Process.....	2E-1
Section 2E.03	General.....	2E-2
Section 2E.04	Color of Guide Signs.....	2E-3
Section 2E.05	Retroreflection or Illumination.....	2E-3
Section 2E.06	Characteristics of Urban Signing .....	2E-3
Section 2E.07	Characteristics of Rural Signing.....	2E-3
Section 2E.07A	Information Provided by Freeway Signing.....	2E-4
Section 2E.08	Memorial Highway Signing .....	2E-5
Section 2E.09	Amount of Legend on Guide Signs.....	2E-5
Section 2E.10	Number of Signs at an Overhead Installation and Sign Spreading.....	2E-5
Section 2E.11	Pull-Through Signs.....	2E-6
Section 2E.12	Designation of Destinations .....	2E-6
Section 2E.13	Size and Style of Letters.....	2E-7
Section 2E.14	Interline and Edge Spacing.....	2E-9
Section 2E.15	Sign Borders .....	2E-9
Section 2E.16	Abbreviations.....	2E-10
Section 2E.17	Symbols .....	2E-10
Section 2E.18	Arrows for Interchange Guide Signs.....	2E-10
Section 2E.19	Diagrammatic Signs .....	2E-10
Section 2E.20	Signing for Interchange Lane Drops .....	2E-18
Section 2E.21	Changeable Message Signs .....	2E-19
Section 2E.22	Overhead Sign Installations.....	2E-21
Section 2E.23	Lateral Offset.....	2E-21
Section 2E.24	Guide Sign Classification.....	2E-21
Section 2E.25	Route Signs and Trailblazer Assemblies .....	2E-26
Section 2E.25A	EISENHOWER INTERSTATE SYSTEM Sign (M1-10, M1-10a) .....	2E-26
Section 2E.26	Signs for Intersections at Grade .....	2E-26
Section 2E.27	Interchange Guide Signs.....	2E-26

Section 2E.28	Interchange Exit Numbering .....	2E-27
Section 2E.29	DELETED .....	2E-28
Section 2E.30	Advance Guide Signs .....	2E-28
Section 2E.31	Next Exit Supplemental Signs.....	2E-29
Section 2E.32	Other Supplemental Guide Signs .....	2E-30
Section 2E.33	Exit Direction Signs .....	2E-31
Section 2E.34	Exit Gore Signs.....	2E-31
Section 2E.35	Post-Interchange Signs .....	2E-32
Section 2E.36	Distance Signs .....	2E-32
Section 2E.37	Interchange Sequence Signs .....	2E-33
Section 2E.38	DELETED .....	2E-33
Section 2E.39	NEXT X EXITS Sign.....	2E-35
Section 2E.40	Signing by Type of Interchange .....	2E-35
Section 2E.41	Freeway-to-Freeway Interchange.....	2E-35
Section 2E.42	Cloverleaf Interchange .....	2E-36
Section 2E.43	Cloverleaf Interchange with Collector-Distributor Roadways.....	2E-36
Section 2E.44	Partial Cloverleaf Interchange.....	2E-38
Section 2E.45	Diamond Interchange .....	2E-38
Section 2E.46	Diamond Interchange in Urban Area .....	2E-38
Section 2E.47	Closely Spaced Interchanges.....	2E-38
Section 2E.48	Minor Interchange .....	2E-44
Section 2E.49	Signing of Approaches and Connecting Roadways .....	2E-44
Section 2E.50	Wrong-Way Traffic Control at Interchange Ramps .....	2E-46
Section 2E.51	General Service Signs.....	2E-46
Section 2E.52	Roadside Park and Scenic Area Signs (E21 Series).....	2E-72
Section 2E.53	Tourist Information and Welcome Center Signs .....	2E-74
Section 2E.54	Reference Location Signs and Enhanced Reference Location Signs (D10-4, D10-5).....	2E-75
Section 2E.55	Miscellaneous Guide Signs .....	2E-76
Section 2E.56	Radio Information Signing .....	2E-76
Section 2E.57	Carpool and Ridesharing Signing.....	2E-77
Section 2E.58	Weigh Station Signing .....	2E-77
Section 2E.59	Preferential Only Lane Signs .....	2E-78

## **CHAPTER 2F. SPECIFIC SERVICE (LOGO) SIGNS**

Section 2F.01	Eligibility .....	2F-1
Section 2F.02	Application.....	2F-2
Section 2F.03	Logos and Logo Panels.....	2F-2
Section 2F.04	Number and Size of Logos and Signs .....	2F-2
Section 2F.05	Size of Lettering .....	2F-3
Section 2F.06	Signs at Interchanges .....	2F-4
Section 2F.07	Single-Exit Interchanges.....	2F-5
Section 2F.08	Double-Exit Interchanges .....	2F-5
Section 2F.09	Signs at Intersections .....	2F-5
Section 2F.10	Signing Policy.....	2F-6

## **CHAPTER 2G. TOURIST-ORIENTED DIRECTIONAL SIGNS**

Section 2G.01	Purpose and Application .....	2G-1
Section 2G.02	Design .....	2G-1
Section 2G.03	Style and Size of Lettering.....	2G-1
Section 2G.04	Arrangement and Size of Signs .....	2G-2
Section 2G.05	DELETED.....	2G-2
Section 2G.06	Sign Locations.....	2G-2
Section 2G.07	State Policy.....	2G-2

## **CHAPTER 2H. RECREATIONAL, HISTORICAL MARKER, TRAFFIC GENERATOR AND CULTURAL INTEREST AREA SIGNS**

Section 2H.01	Scope .....	2H-1
Section 2H.02	Application of Recreational and Cultural Interest Area Signs .....	2H-1
Section 2H.03	Regulatory and Warning Signs .....	2H-1
Section 2H.04	General Design Requirements for Recreational and Cultural Interest Area Symbol Signs .....	2H-1
Section 2H.05	Symbol Sign Sizes .....	2H-2
Section 2H.06	Use of Educational Plaques .....	2H-3
Section 2H.07	Use of Prohibitive Slash.....	2H-3
Section 2H.08	Placement of Recreational and Cultural Interest Area Symbol Signs .....	2H-4
Section 2H.09	Destination Guide Signs.....	2H-11
Section 2H.10	Traffic Generator Criteria .....	2H-11
Section 2H.11	Memorial and Named Highways .....	2H-13
Section 2H.12	Historic Routes .....	2H-13
Section 2H.13	Historical Marker Guide Signs .....	2H-14
Section 2H.14	Historical Marker Reference Number plaque .....	2H-14

## **CHAPTER 2I. EMERGENCY MANAGEMENT SIGNING**

Section 2I.01	Emergency Management .....	2I-1
Section 2I.02	Design of Emergency Management Signs .....	2I-1
Section 2I.03	EVACUATION ROUTE Sign (EM-1) .....	2I-1
Section 2I.04	AREA CLOSED Sign (EM-2).....	2I-2
Section 2I.05	TRAFFIC CONTROL POINT Sign (EM-3).....	2I-2
Section 2I.06	MAINTAIN TOP SAFE SPEED Sign (EM-4) .....	2I-2
Section 2I.07	ROAD (AREA) USE PERMIT REQUIRED FOR THRU TRAFFIC Sign (EM-5).....	2I-3
Section 2I.08	Emergency Aid Center Signs (EM-6 Series).....	2I-4
Section 2I.09	Shelter Directional Signs (EM-7 Series).....	2I-4

## **CHAPTER 2J. TOLL ROAD SIGNING**

Section 2J.01	General.....	2J-1
Section 2J.02	Toll Road Route Shields and Auxiliaries .....	2J-1
Section 2J.03	TOLL ROAD BEGINS (R90-1) Sign .....	2J-1
Section 2J.04	FREE EXIT (R90-5, R90-6) Plaques.....	2J-1
Section 2J.05	Toll Rate Schedule (R90-2) Sign.....	2J-1

## **FIGURES**

### **CHAPTER 2A. GENERAL**

Figure 2A-1	Examples of Heights and Lateral Locations of Signs for Typical Installations .....	2A-11
Figure 2A-2	Examples of Locations for Some Typical Signs at Intersections .....	2A-12

### **CHAPTER 2B. REGULATORY SIGNS**

Figure 2B-1	STOP, YIELD and PLAQUES.....	2B-5
Figure 2B-2	Unsignalized Pedestrian Crosswalk Signs .....	2B-6
Figure 2B-3	Speed Limit, FINES HIGHER and Turn Prohibition Signs .....	2B-8
Figure 2B-4	Intersection and Mandatory Movement Lane Control Signs .....	2B-11
Figure 2B-5	Center and Reversible Lane Control Signs.....	2B-14
Figure 2B-6	Location of Reversible Two-Way Left-Turn Signs.....	2B-15
Figure 2B-7	Examples of Preferential Only Lane Signs.....	2B-19
Figure 2B-8	Passing, Keep Right, and Truck Lane Signs.....	2B-24
Figure 2B-9	Traffic Prohibition Signs .....	2B-27

Figure 2B-10	Example of Wrong-Way Signing for a Divided Highway with a Median Width 30 ft or Greater.....	2B-28
Figure 2B-11	ONE WAY and Divided Highway Crossing Signs .....	2B-29
Figure 2B-12	Examples of Locations of ONE WAY Signs .....	2A-30, 31
Figure 2B-13	Examples of ONE WAY Signing for Divided Highways with Wide Median .....	2A-32
Figure 2B-14	Examples of ONE WAY Signing for Divided Highways with Narrow Median and Without Yield Signs .....	2A-33
Figure 2B-15	Examples of ONE WAY Signing for Divided Highways with Narrow Median and Interior Yield Signs.....	2B-34
Figure 2B-15A	Crossover Signing with Narrow Median and Interior Yield Signs .....	2B-35
Figure 2B-15B	Crossover Signing with Narrow Median and Without Interior Yield Signs .....	2B-35
Figure 2B-16	Parking Signs (R7 Series) .....	2B-38
Figure 2B-17	Parking Signs (R8 Series) .....	2B-39
Figure 2B-18	Pedestrian Signs .....	2B-41
Figure 2B-19	Traffic Signal and Photo Enforced Signs .....	2B-43
Figure 2B-20	Road Closed, Weight and Width Limit Signs.....	2B-45
Figure 2B-20A.	Width Limit Signs .....	2B-47
Figure 2B-21	Truck Signs.....	2B-48
Figure 2B-22	Seat Belt Symbol.....	2B-49
Figure 2B-23	Other Regulatory Signs.....	2B-50

## CHAPTER 2C. WARNING SIGNS

Figure 2C-1	Horizontal Alignment Signs .....	2C-6
Figure 2C-2	Vertical Grade Signs.....	2C-9
Figure 2C-3	Miscellaneous Warning Signs .....	2C-10
Figure 2C-4	Roadway Condition and Advance Traffic Control Signs.....	2C-13
Figure 2C-5	Advisory Speed and Speed Reduction Signs .....	2C-15
Figure 2C-6	Merging and Passing Signs .....	2C-16
Figure 2C-7	Example of Advisory Speed Signing for an Exit Ramp .....	2C-18
Figure 2C-8	Intersection Warning Signs .....	2C-19
Figure 2C-9	Vehicular Traffic Signs.....	2C-21
Figure 2C-10	Nonvehicular Traffic Signs .....	2C-21
Figure 2C-11	Supplemental Warning Plaques.....	2C-22
Figure 2C-12	Other Warning Signs.....	2C-25

## CHAPTER 2D. GUIDE SIGNS—CONVENTIONAL ROADS

Figure 2D-1	Examples of Color-Coded Destination Guide Signs .....	2D-2
Figure 2D-2	Arrows for Use on Guide Signs.....	2D-3
Figure 2D-3	Route Marker Signs.....	2D-5
Figure 2D-4	Route Sign Auxiliaries .....	2D-7
Figure 2D-5	Directional Arrow Auxiliary Signs .....	2D-10
Figure 2D-6	Illustration of Directional Assemblies and Other Route Signs (For One Direction of Travel Only).....	2D-11, 12, 13
Figure 2D-7	Destination and Distance Signs .....	2D-16
Figure 2D-8	Street Name and Parking Signs.....	2D-19
Figure 2D-9	Roadside Park Area and Scenic Overlook Signs .....	2D-21
Figure 2D-10	DELETED .....	2D-22
Figure 2D-11	General Service Signs .....	2D-23
Figure 2D-11A.	Overhead Freeway Guide Sign and Routing Plaque Typical Assemblies .....	2D-24
Figure 2D-12	General Information Signs .....	2D-25
Figure 2D-13	Reference Location Signs .....	2D-26
Figure 2D-14	DELETED.....	2D-29
Figure 2D-14A	Additional Signs .....	2D-29

**CHAPTER 2E. GUIDE SIGNS—FREEWAYS AND EXPRESSWAYS**

Figure 2E-1.	Advance Guide and Exit Direction Sign Design Process .....	2E-2
Figure 2E-1.1.	Example of Guide Sign Information Units .....	2E-4
Figure 2E-1.2.	Example of Guide Sign Spreading.....	2E-5
Figure 2E-2	Pull-Through Signs.....	2E-6
Figure 2E-2.1.	Letter Style and Minimum Letter/Numerical Sizes for Advance Guide Signs.....	2E-9
Figure 2E-3	Diagrammatic Sign for a Single-Lane Left Exit .....	2E-12
Figure 2E-4	Diagrammatic Signs for Split with Dedicated Lanes.....	2E-13
Figure 2E-5	Diagrammatic Signs for Split with Optional Lane.....	2E-14
Figure 2E-6	Diagrammatic Signs for Two-Lane Exit with Optional Lane .....	2E-15
Figure 2E-7	Diagrammatic Signs for Two-Lane Exit with Optional Lane .....	2E-16
Figure 2E-8	EXIT ONLY on Left with Diagrammatic Sign for Left Lane Dropped at an Interchange.....	2E-17
Figure 2E-9	EXIT ONLY Panels.....	2E-19
Figure 2E-10	EXIT ONLY Panels for Right Lane Dropped at an Interchange .....	2E-20
Figure 2E-11	Interstate and U.S. Route Signs.....	2E-22
Figure 2E-12	Example of Interchange Numbering for Mainline and Circumferential Routes.....	2E-23
Figure 2E-13	Example of Interchange Numbering for Mainline, Loop, and Spur Routes.....	2E-24
Figure 2E-14	Example of Interchange Numbering If Routes Overlap .....	2E-25
Figure 2E-15	Examples of Interchange Advance Guide Signs .....	2E-28
Figure 2E-16	Next Exit Supplemental Advance Guide Signs.....	2E-29
Figure 2E-17	Supplemental Guide Signs for Multi-exit Interchanges.....	2E-30
Figure 2E-18	Supplemental Guide Sign for a Park and Ride Facility (Without Exit Numbering) .....	2E-30
Figure 2E-19	Supplemental Guide Sign for a Park and Ride Facility (With Exit Numbering) .....	2E-30
Figure 2E-20	Interchange Exit Direction Sign.....	2E-30
Figure 2E-21	Exit Gore Signs.....	2E-32
Figure 2E-22	Post-Interchange Distance Sign.....	2E-33
Figure 2E-23	Signing of Closely Spaced Interchanges Using Interchange Sequence Signs.....	2E-34
Figure 2E-24	Interchange Sequence Sign.....	2E-35
Figure 2E-25	Community Interchanges Identification Sign.....	2E-35
Figure 2E-26	NEXT EXITS Sign.....	2E-35
Figure 2E-27	Examples of Freeway-to-Freeway Interchange Guide Signs.....	2E-37
Figure 2E-28	Examples of Guide Signs for Full Cloverleaf Interchange .....	2E-39
Figure 2E-29	Examples of Guide Signs for Full Cloverleaf Interchange with Collector-Distributor Roadways.....	2E-40
Figure 2E-30	Examples of Partial Cloverleaf Interchange Guide Signs.....	2E-41
Figure 2E-31	Examples of Diamond Interchange Guide Signs .....	2E-42
Figure 2E-32	Examples of Diamond Interchange Guide Signs in an Urban Area .....	2E-43
Figure 2E-33	Examples of Minor Interchange Guide Signs .....	2E-45
Figure 2E-34	Example of Crossroad Signing for a One-Lane Approach .....	2E-47
Figure 2E-35	Example of Minor Interchange Crossroad Signing.....	2E-48
Figure 2E-36	Examples of Multi-lane Crossroad Signing for Diamond Interchange .....	2E-49
Figure 2E-37	Examples of Multi-lane Crossroad Signing for Partial Cloverleaf Interchange.....	2E-50
Figure 2E-38	Examples of Multi-lane Crossroad Signing for Cloverleaf Interchange .....	2E-51
Figure 2E-38A.	Four-leg Directional Interchange with One Ramp from Freeway Main Lanes Serving Two Destinations.....	2E-52
Figure 2E-38B.	Signing for a One Ramp Double Lane Drop, with One-lane Destination to the Left and Different Destination to Right.....	2E-53
Figure 2E-38C.	Signing for a One Ramp Double Lane Drop, with Two-lane Destination to the Left and One-lane Destination to Right .....	2E-54
Figure 2E-38D.	Signing for a One Ramp Double Lane Drop, with One-lane Destination to the Left and Two-lane Destination to Right.....	2E-55

Figure 2E-38E.	Signing for a One Lane Drop and One Lane Optional Exit Ramp, With One-lane Destination to the Left and Different Destination to Right.....	2E-56
Figure 2E-38F.	Four-leg Directional Interchange with Two Ramps from Freeway Main Lanes Serving Two Destinations.....	2E-57
Figure 2E-38G.	Signing for Two One-lane Drop Exit Ramps, Serving Two Destinations .....	2E-58
Figure 2E-38H.	Signing for Two, Right-lane Exit Ramps, Serving Two Destinations.....	2E-59
Figure 2E-38I.	Signing for Right-lane Drop Ramp and Right Lane Exit Ramp, Serving Two Destinations .....	2E-60
Figure 2E-38J.	Signing for Right-lane Exit Ramp and Right Lane Drop Ramp, Serving Two Destinations .....	2E-61
Figure 2E-38K.	Three-leg Directional Interchange with Continuing and Terminating Routes.....	2E-62
Figure 2E-38L.	Signing for a Three-leg Directional Interchange Approach with Route Continuing Left at the Split .....	2E-63
Figure 2E-38M.	Signing for a Three-leg Directional Interchange Approach with Route Continuing Right at the Split.....	2E-64
Figure 2E-38N.	Signing for a Three-leg Directional Interchange Approach with Route Ending at the Split .....	2E-65
Figure 2E-38O.	Cloverleaf Interchange with Collector-Distributor Roads .....	2E-66
Figure 2E-38P.	Signing for a Typical Cloverleaf Interchange with Collector-Distributor Roads .....	2E-67
Figure 2E-38Q.	Signing for a Typical Cloverleaf Interchange with Collector-Distributor Roads .....	2E-68
Figure 2E-39	Examples of Regulatory Signing and Pavement Markings at Exit Ramp Termination to Deter Wrong-Way Entry .....	2E-69
Figure 2E-40	Examples of Regulatory Signing and Pavement Markings at Entrance Ramp Terminal Where Design Does Not Clearly Indicate the Direction of Flow.....	2E-69
Figure 2E-41	Examples of General Service Signs (without Exit Numbering) .....	2E-71
Figure 2E-42	Examples of General Service Signs (with Exit Numbering) .....	2E-71
Figure 2E-43	Example of Next Services Sign.....	2E-71
Figure 2E-44	Examples of Rest Area and Scenic Overlook and Welcome Center Signs.....	2E-73
Figure 2E-45	Enhanced Reference Location Signs .....	2E-76
Figure 2E-46	Example of Signing for the Entrance to Barrier-Separated HOV Lanes .....	2E-80
Figure 2E-47	Example of Signing for the Intermediate Entry to and Exit from Barrier- or Buffer-Separated HOV Lanes.....	2E-81
Figure 2E-48	Example of Signing for the Entrance to and Exit from an Added HOV Lane .....	2E-82
Figure 2E-49	Example of Signing for the Entrance to and Exit from a General Purpose Lane that Becomes an HOV Lane.....	2E-83
Figure 2E-50	Example of Signing for a Direct Access Ramp to an HOV Lane from a Park & Ride Facility .....	2E-84
Figure 2E-51	Example of Signing for a Direct Access Ramp to an HOV Lane from a Local Street .....	2E-85
Figure 2E-52	Example of Signing for a Direct Access Ramp between HOV Lanes on Separate Freeways .....	2E-86

## **CHAPTER 2F. SPECIFIC SERVICE SIGNS**

Figure 2F-1	Examples of Specific Service Signs .....	2F-3
Figure 2F-2	Examples of Specific Service Sign Locations.....	2F-4

## **CHAPTER 2G. TOURIST-ORIENTED DIRECTIONAL SIGNS**

Figure 2G-1	Examples of Tourist-Oriented Directional Signs .....	2G-3
Figure 2G-2	Examples of Intersection Approach Signs for Tourist-Oriented Directional Signs.....	2G-4

## **CHAPTER 2H. RECREATIONAL, HISTORICAL MARKER, TRAFFIC GENERATOR AND CULTURAL INTEREST AREA SIGNS**

Figure 2H-1	Examples of Use of Educational Plaques, Prohibitory Slashes, and Arrows .....	2H-3
Figure 2H-2	Examples of General Directional Guide Signs for Conventional Roads .....	2H-4
Figure 2H-3	Height and Lateral Position of Signs Located Within Recreational and Cultural Interest Areas .....	2H-5
Figure 2H-4	Examples of Symbol Signing Layout .....	2H-6
Figure 2H-5	Recreational and Cultural Interest Area Symbol Signs .....	2H-7, 8, 9, 10, 11
Figure 2H-6.	Additional Recreational and Cultural Interest Area Signs .....	2H-13

## **CHAPTER 2I. EMERGENCY MANAGEMENT SIGNING**

Figure 2I-1	Emergency Management Signs .....	2I-3
-------------	----------------------------------	------

## **CHAPTER 2J. TOLL ROAD SIGNING**

Figure 2J-1	Toll Road Signs .....	2J-2
Figure 2J-2	Non-Toll Roadway with Exit to Toll Roadway .....	2J-3
Figure 2J-3	Non-Toll Roadway with Exit to Concurrent Toll Roadway .....	2J-4
Figure 2J-4	Non-Toll Roadway Convert to Toll Roadway .....	2J-5
Figure 2J-5	Non-Toll Roadway with Left Exit to Toll Lane .....	2J-6
Figure 2J-6	Signing for Non-Toll Conventional Highway to Toll Road Interchange .....	2J-7
Figure 2J-7	Toll Independent Mount Signing .....	2J-8
Figure 2J-8A	Toll/Cash Plaza Off Main Lanes (Option A) .....	2J-9
Figure 2J-8B	Toll/Cash Plaza Main Lanes (Option B) .....	2J-10
Figure 2J-9	Toll/Cash Plaza On Main Lanes .....	2J-11

## **TABLES**

### **CHAPTER 2A. GENERAL**

Table 2A-1	Illumination of Sign Elements .....	2A-4
Table 2A-2	Retroreflection of Sign Elements .....	2A-4
Table 2A-2.1	Minimum Maintained Retroreflectivity Levels .....	2A-6
Table 2A-3	Use of Sign Shapes .....	2A-7
Table 2A-4	Common Uses of Sign Colors .....	2A-8

### **CHAPTER 2B. REGULATORY SIGNS**

Table 2B-1	Regulatory Sign Sizes .....	2B-2
Table 2B-2	Meanings of Symbols and Legends on Reversible Lane Control Signs .....	2B-16

### **CHAPTER 2C. WARNING SIGNS**

Table 2C-1	DELETED	
Table 2C-2	Warning Sign Sizes .....	2C-3
Table 2C-3	Minimum Size of Supplemental Warning Plaques .....	2C-4
Table 2C-4	Guidelines for Advance Placement of Warning Signs .....	2C-5
Table 2C-5	Horizontal Alignment Sign Usage .....	2C-7

### **CHAPTER 2E. GUIDE SIGNS—FREEWAYS AND EXPRESSWAYS**

Table 2E-1	Maximum amount of Information per Freeway Guide Sign Structure .....	2E-4
Table 2E-2	Minimum Letter and Numeral Sizes for Advance Guide and Exit Direction Signs .....	2E-7
Table 2E-2.1	Minimum Letter and Numeral Sizes for Expressway Guide Signs According to Sign Type .....	2E-8

Table 2E-3 Acceptable Abbreviations for Freeway Guide Signs .....2E-11, 12  
Table 2E-4 DELETED .....2E-12

**CHAPTER 2H. RECREATIONAL, HISTORICAL MARKER, TRAFFIC GENERATOR AND CULTURAL INTEREST AREA SIGNS**

Table 2H-1 Category Chart for Symbols .....2H-2  
Table 2H-2 Traffic Generator Criteria .....2H-12

**CHAPTER 2I. EMERGENCY MANAGEMENT SIGNING**

Table 2I-1 Emergency Management Sign Sizes .....2I-2

## CHAPTER 2A. GENERAL

### **Section 2A.01 Function and Purpose of Signs**

Support:

This Manual contains Standards, Guidance, and Options for the signing within the right-of-way of all types of highways open to public travel. The functions of signs are to provide regulations, warnings, and guidance information for road users. Both words and symbols are used to convey the messages. Signs are not typically used to confirm rules of the road.

Detailed sign requirements are located in the following Chapters of Part 2:

Chapter 2B—Regulatory Signs

Chapter 2C—Warning Signs

Chapter 2D—Guide Signs (Conventional Roads)

Chapter 2E—Guide Signs (Freeways and Expressways)

Chapter 2F—Specific Service (Logo) Signs

Chapter 2G—Tourist-Oriented Direction Signs

Chapter 2H—Recreational and Cultural Interest Area Signs

Chapter 2I—Emergency Management Signs

**Standard:**

**Because the requirements and standards for signs depend on the particular type of highway upon which they are to be used, the following definitions shall apply:**

- A. Freeway—a divided highway with full control of access;**
- B. Expressway—a divided highway with partial control of access;**
- C. Conventional Road—a street or highway other than a low-volume road (as defined in Section 5A.01), a freeway, or an expressway; and**
- D. Special Purpose Road—a low-volume, low-speed road that serves recreational areas or resource development activities, or that provides local access.**

### **Section 2A.02 Definitions**

Support:

Definitions that are applicable to signs are given in Sections 1A.13 and 2A.01.

### **Section 2A.03 Standardization of Application**

Support:

It is recognized that urban traffic conditions differ from those in rural environments, and in many instances signs are applied and located differently. Where pertinent and practical, this Manual sets forth separate recommendations for urban and rural conditions.

Guidance:

Signs should be used only where justified by engineering judgment or studies, as noted in Section 1A.09.

Results from traffic engineering studies of physical and traffic factors should indicate the locations where signs are deemed necessary or desirable.

Roadway geometric design and sign application should be coordinated so that signing can be effectively placed to give the road user any necessary regulatory, warning, guidance, and other information.

**Standard:**

**Each standard sign shall be displayed only for the specific purpose as prescribed in this Manual. Determination of the particular signs to be applied to a specific condition shall be made in accordance with the criteria set forth in Part 2. Before any new highway, detour, or temporary route is opened to traffic, all necessary signs shall be in place. Signs required by road conditions or restrictions shall be removed when those conditions cease to exist or the restrictions are withdrawn.**

### **Section 2A.04 Excessive Use of Signs**

Guidance:

Regulatory and warning signs should be used conservatively because these signs, if used to excess, tend to lose their effectiveness. If used, route signs and directional signs should be used frequently because they promote reasonably safe and efficient operations by keeping road users informed of their location.

### **Section 2A.05 Classification of Signs**

#### **Standard:**

Signs shall be defined by their function as follows:

- A. Regulatory signs give notice of traffic laws or regulations.**
- B. Warning signs give notice of a situation that might not be readily apparent.**
- C. Guide signs show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, or cultural information.**

### **Section 2A.06 Design of Signs**

#### **Support:**

This Manual shows many typical standard signs approved for use on streets, highways, bikeways, and pedestrian crossings.

In the specifications for individual signs, the general appearance of the legend, color, and size are shown in the accompanying tables and illustrations, and are not always detailed in the text.

Detailed drawings of standard signs and alphabets are shown in the “Standard Highway Sign Designs for Texas” book. Section 1A.11 contains information regarding how to obtain this publication.

The basic requirements of a highway sign are that it be legible to those for whom it is intended and that it be understandable in time to permit a proper response. Desirable attributes include:

- A. High visibility by day and night; and**
- B. High legibility (adequately sized letters or symbols, and a short legend for quick comprehension by a road user approaching a sign).**

Standardized colors and shapes are specified so that the several classes of traffic signs can be promptly recognized. Simplicity and uniformity in design, position, and application are important.

#### **Standard:**

**The term legend shall include all word messages, symbol designs and borders (unless specified separately) that are intended to convey specific meanings.**

**Uniformity in design shall include shape, color, dimensions, legends, borders, and illumination or retroreflectivity.**

**Where a standard word message is applicable, the wording shall be as herein provided.**

**Standardization of these designs does not preclude further improvement by minor changes in the proportion or orientation of symbols, width of borders, or layout of word messages, but all shapes and colors shall be as indicated.**

**In situations where word messages are required other than those herein provided, the signs shall be of the same shape and color as standard signs of the same functional type.**

**Except as stated in the Option below, Internet addresses shall not be shown on any sign, supplemental plaque, sign panel (including logo panels on specific service signs), or changeable message sign.**

#### **Guidance:**

Unless otherwise stated in this Manual for a specific sign, and except as stated in the Option below, physical addresses, phone numbers of more than four characters and hours of operation should not be shown on any sign, supplemental plaque, sign panel (including logo panels on specific service signs), or changeable message sign.

#### **Option:**

Physical addresses, Internet addresses, phone numbers with more than four characters or hours of operation may be shown on signs, supplemental plaques, sign panels, and changeable message signs that are intended for viewing only by pedestrians, bicyclists, occupants of parked vehicles, or drivers of vehicles on low-speed roadways where engineering judgment indicates that drivers can reasonably safely stop out of the traffic flow to read the message.

State and local highway agencies may develop special word message signs in situations where roadway conditions make it necessary to provide road users with additional regulatory, warning, or guidance information.

### **Section 2A.07 Changeable Message Signs**

#### **Standard:**

**To the extent practical, changeable message signs, which are traffic control devices designed to display**

**variable messages, shall conform to the principles established in this Manual, and with the design and applications prescribed in Sections 2E.21, 6F.02, and 6F.55.**

Guidance:

Except for safety or transportation-related messages, changeable message signs should not be used to display information other than regulatory, warning, and guidance information related to traffic control.

Support:

Changeable message signs, with more sophisticated technologies, are gaining widespread use to inform road users of variable situations, particularly along congested traffic corridors. Highway and transportation organizations are encouraged to develop and experiment (see Section 1A.10) with changeable message signs and to carefully evaluate such installations so that experience is gained toward adoption of future standards.

Information regarding the design and application of portable changeable message signs in temporary traffic control zones is contained in Section 6F.55. Section 1A.14 contains information regarding the use of abbreviations on traffic control devices, including changeable message signs.

Option:

Changeable message signs (including portable changeable message signs) that display a regulatory or warning message may use a black background with a white, yellow, orange, red, or fluorescent yellow-green legend as appropriate, except where specifically restricted in this Manual for a particular sign.

Changeable message signs, both permanent and portable, may be used by State and local highway agencies to display safety or transportation-related messages. State and local highway agencies may develop and establish a policy regarding the display of safety and transportation-related messages on permanent and changeable message signs that specifies the allowable messages and applications, consistent with the provisions of this Manual.

Support:

Examples of safety messages include SEAT BELTS BUCKLED?, DON'T DRINK AND DRIVE or American Broadcast Emergency Response (AMBER Alert) information. Examples of transportation-related messages include STADIUM EVENT SUNDAY, EXPECT DELAYS NOON TO 4 PM, OZONE ALERT, USE TRANSIT.

Guidance:

When a changeable message sign is used to display a safety or transportation-related message, the requirements of Section 6F.55 should be followed. The message should be simple, brief, legible, and clear. A changeable message sign should not be used to display a safety or transportation-related message if doing so would adversely affect the respect for the sign. "CONGESTION AHEAD" or other overly simplistic or vague messages should not be displayed alone. These messages should be supplemented with a message on the location or distance to the congestion or incident, how much delay is expected, alternative route, or other similar messages.

**Standard:**

**When a changeable message sign is used to display a safety or transportation-related message, the display format shall not be of a type that could be considered similar to advertising displays. The display format shall not include animation, rapid flashing, or other dynamic elements that are characteristic of sports scoreboards or advertising displays.**

### **Section 2A.08 Retroreflectivity and Illumination**

Support:

There are many materials currently available for retroreflection and various methods currently available for the illumination of signs. New materials and methods continue to emerge. New materials and methods can be used as long as the signs meet the standard requirements for color, both by day and by night.

**Standard:**

**Regulatory, warning, and guide signs shall be retroreflective or illuminated to show the same shape and similar color by both day and night, unless specifically stated otherwise in the text discussion in this Manual of a particular sign or group of signs.**

**The requirements for sign illumination shall not be considered to be satisfied by street or highway lighting.**

**Table 2A-1. Illumination of Sign Elements**

<b>Means of Illumination</b>	<b>Sign Element To Be Illuminated</b>
Light behind the sign face	<ul style="list-style-type: none"> <li>• Symbol or word message</li> <li>• Background</li> <li>• Symbol, word message, and background (through a translucent material)</li> </ul>
Attached or independently mounted light source designed to direct essentially uniform illumination onto the sign face	<ul style="list-style-type: none"> <li>• Entire sign face</li> </ul>
Light emitting diodes (LEDs)	<ul style="list-style-type: none"> <li>• Symbol or word message</li> <li>• Portions of the sign border</li> </ul>
Other devices, or treatments that highlight the sign shape, color, or message: Luminous tubing Fiber optics Incandescent light bulbs Luminescent panels	<ul style="list-style-type: none"> <li>• Symbol or word message</li> <li>• Entire sign face</li> </ul>

**Table 2A-2. Retroreflection of Sign Elements**

<b>Means of Retroreflection</b>	<b>Sign Element</b>
Reflector “buttons” or similar units	Symbol Word message Border
A material that has a smooth, sealed outer surface over a microstructure that reflects light.	Symbol Word message Border Background

**Guidance:**

All overhead sign installations should use retroreflective materials unless an engineering study shows that illumination is needed.

**Option:**

Sign elements may be illuminated by the means shown in Table 2A-1.

Retroreflection of sign elements may be accomplished by the means shown in Table 2A-2.

Light Emitting Diode (LED) units may be used individually within the face of a sign and in the border of a sign, except for Changeable Message Signs, to improve the conspicuity, increase the legibility of sign legends and borders, or provide a changeable message. Individual LED pixels may be used in the border of a sign.

**Standard:**

**If used, the LEDs shall be the same color as the sign legend, border, or background. If flashed, all LED units shall flash simultaneously at a rate of more than 50 and less than 60 times per minute. The uniformity of the sign design shall be maintained without any decrease in visibility, legibility, or driver comprehension during either daytime or nighttime conditions.**

**A module of multiple LED units used as a closely-spaced, single light source shall only be used within the sign face for legends or symbols.**

**Support:**

Information regarding the use of retroreflective material on the sign support is contained in Section 2A.21.

**Section 2A.09 Maintaining Minimum Retroreflectivity****Support:**

Retroreflectivity is one of several factors associated with maintaining nighttime sign visibility (see Section 2A.22).

**Standard:**

**Public agencies or officials having jurisdiction shall use an assessment or management method that is designed to maintain sign retroreflectivity at or above the minimum levels in Table 2A-2.1.**

**Support:**

Compliance with the above Standard is achieved by having a method in place and using the method to maintain the minimum levels established in Table 2A-2.1. Provided that an assessment or management method is being used, an agency or official having jurisdiction would be in compliance with the above Standard even if there are some individual signs that do not meet the minimum retroreflectivity levels at a particular point in time.

**Guidance:**

Except for those signs specifically identified in the Option in this Section, one or more of the following assessment or management methods should be used to maintain sign retroreflectivity:

- A. Visual Nighttime Inspection – The retroreflectivity of an existing sign is assessed by a trained sign inspector conducting a visual inspection from a moving vehicle during nighttime conditions. Signs that are visually identified by the inspector to have retroreflectivity below the minimum levels should be replaced.
- B. Measured Sign Retroreflectivity – Sign retroreflectivity is measured using a retroreflectometer. Signs with retroreflectivity below the minimum levels should be replaced.
- C. Expected Sign Life – When signs are installed, the installation date is labeled or recorded so that the age of a sign is known. The age of the sign is compared to the expected sign life. The expected sign life is based on the experience of sign retroreflectivity degradation in a geographic area compared to the minimum levels. Signs older than the expected life should be replaced.
- D. Blanket Replacement – All signs in an area/corridor, or of a given type, should be replaced at specified intervals. This eliminates the need to assess retroreflectivity or track the life of individual signs. The replacement interval is based on the expected sign life, compared to the minimum levels, for the shortest-life material used on the affected signs.
- E. Control Signs – Replacement of signs in the field is based on the performance of a sample of control signs. The control signs might be a small sample located in a maintenance yard or a sample of signs in the field. The control signs are monitored to determine the end of retroreflective life for the associated signs. All field signs represented by the control sample should be replaced before the retroreflectivity levels of the control sample reach the minimum levels.
- F. Other Methods – Other methods developed based on engineering studies can be used.

**Support:**

Additional information about these methods is contained in the 2007 Edition of FHWA's "Maintaining Traffic Sign Retroreflectivity" (see Section 1A.11).

**Option:**

Highway agencies may exclude the following signs from the retroreflectivity maintenance guidelines described in this Section:

Table 2A-2.1. Minimum Maintained Retroreflectivity Levels <sup>①</sup>

Sign Color	Sheeting Type (ASTM D4956-04)				Additional Criteria
	Beaded Sheeting			Prismatic Sheeting	
	I	II	III	III, IV, VI, VII, VIII, IX, X	
White on Green	W*; G ≥ 7	W*; G ≥ 15	W*; G ≥ 25	W ≥ 250; G ≥ 25	Overhead
	W*; G ≥ 7	W ≥ 120; G ≥ 15			Ground-mounted
Black on Yellow or Black on Orange	Y*; O*	Y ≥ 50; O ≥ 50			Ⓜ
	Y*; O*	Y ≥ 75; O ≥ 75			Ⓝ
White on Red	W ≥ 35; R ≥ 7				Ⓞ
Black on White	W ≥ 50				—

- ① The minimum maintained retroreflectivity levels shown in this table are in units of cd/lx/m<sup>2</sup> measured at an observation angle of 0.2° and an entrance angle of -4.0°.
- Ⓜ For text and fine symbol signs measuring at least 1200 mm (48 in) and for all sizes of bold symbol signs
- Ⓝ For text and fine symbol signs measuring less than 1200 mm (48 in)
- Ⓞ Minimum Sign Contrast Ratio ≥ 3:1 (white retroreflectivity ÷ red retroreflectivity)
- \* This sheeting type should not be used for this color for this application.

**Bold Symbol Signs**

<ul style="list-style-type: none"> <li>• W1-1, -2 – Turn and Curve</li> <li>• W1-3, -4 – Reverse Turn and Curve</li> <li>• W1-5 – Winding Road</li> <li>• W1-6, -7 – Large Arrow</li> <li>• W1-8 – Chevron</li> <li>• W1-10 – Intersection in Curve</li> <li>• W1-11 – Hairpin Curve</li> <li>• W1-15 – 270 Degree Loop</li> <li>• W2-1 – Cross Road</li> <li>• W2-2, -3 – Side Road</li> <li>• W2-4, -5 – T and Y Intersection</li> <li>• W2-6 – Circular Intersection</li> <li>• W3-1 – Stop Ahead</li> </ul>	<ul style="list-style-type: none"> <li>• W3-2 – Yield Ahead</li> <li>• W3-3 – Signal Ahead</li> <li>• W4-1 – Merge</li> <li>• W4-2 – Lane Ends</li> <li>• W4-3 – Added Lane</li> <li>• W4-5 – Entering Roadway Merge</li> <li>• W4-6 – Entering Roadway Added Lane</li> <li>• W6-1, -2 – Divided Highway Begins and Ends</li> <li>• W6-3 – Two-Way Traffic</li> <li>• W10-1, -2, -3, -4, -11, -12 – Highway-Railroad Advance Warning</li> </ul>	<ul style="list-style-type: none"> <li>• W11-2 – Pedestrian Crossing</li> <li>• W11-3 – Deer Crossing</li> <li>• W11-4 – Cattle Crossing</li> <li>• W11-5 – Farm Equipment</li> <li>• W11-6 – Snowmobile Crossing</li> <li>• W11-7 – Equestrian Crossing</li> <li>• W11-8 – Fire Station</li> <li>• W11-10 – Truck Crossing</li> <li>• W12-1 – Double Arrow</li> <li>• W16-5p, -6p, -7p – Pointing Arrow Plaques</li> <li>• W20-7a – Flagger</li> <li>• W21-1a – Worker</li> </ul>
---	---	--

**Fine Symbol Signs** – Symbol signs not listed as Bold Symbol Signs.

**Special Cases**

- W3-1 – Stop Ahead: Red retroreflectivity ≥ 7
- W3-2 – Yield Ahead: Red retroreflectivity ≥ 7; White retroreflectivity ≥ 35
- W3-3 – Signal Ahead: Red retroreflectivity ≥ 7; Green retroreflectivity ≥ 7
- W3-5 – Speed Reduction: White retroreflectivity ≥ 50
- For non-diamond shaped signs such W14-3 (No Passing Zone), W4-4p (Cross Traffic Does Not Stop), or W13-1, -2, -3, -5 (Speed Advisory Plaques), use largest sign dimension to determine proper minimum retroreflectivity level.

- A. Parking, Standing, and Stopping signs (R7 and R8 series)
- B. Walking/Hitchhiking/Crossing signs (R9 series, R10-1 through R10-4b)
- C. Adopt-A-Highway signs
- D. All signs with blue or brown backgrounds
- E. Bikeway signs that are intended for exclusive use by bicyclists or pedestrians

**Section 2A.10 Shapes****Standard:**

Particular shapes, as shown in Table 2A-3, shall be used exclusively for specific signs or series of signs, unless specifically stated otherwise in the text discussion in this Manual for a particular sign or class of signs.

**Table 2A-3. Use of Sign Shapes**

Shape	Signs
Octagon	* Stop
Equilateral Triangle (1 point down)	* Yield
Circle	Highway-Rail Grade Crossing (Advance Warning) Emergency Evacuation Route Marker
Pennant Shape / Isosceles Triangle (longer axis horizontal)	* No Passing
Pentagon (pointed up)	* School Crossing Series * County Route Sign
Crossbuck (two rectangles in an "X" configuration)	* Highway-Rail Grade Crossing
Diamond	Warning
Rectangle	Regulatory Series ** Guide Series Warning Series
Trapezoid	* Recreational Series

\* Indicates exclusive use

\*\* Guide series includes general service, specific service, and recreation signs.

**Section 2A.11 Sign Colors****Standard:**

The colors to be used on standard signs and their specific use on these signs shall be as indicated in the applicable Sections of this Manual. The color coordinates and values shall be as described in 23 CFR, Part 655, Subpart F, Appendix.

**Support:**

As a quick reference, common uses of sign colors are shown in Table 2A-4. Color schemes on specific signs are shown in the illustrations located in each appropriate Section.

Whenever white is specified herein as a color, it is understood to include silver-colored retroreflective coatings or elements that reflect white light.

The colors coral, purple, and light blue are being reserved for uses that will be determined in the future by the Federal Highway Administration.

Information regarding color coding of destinations on guide signs is contained in Section 2D.03.

**Section 2A.12 Dimensions****Support:**

Sign sizes for use on the different classes of highways are shown in Sections 2B.03, 2C.04, 2D.04, 5A.03, 6F.02, 7B.01, 8B.02, and 9B.02, and in the "Standard Highway Sign Designs for Texas" book.

**Table 2A-4. Common Uses of Sign Colors**

Type of Sign	Legend					Background									
	Black	Green	Red	White	Yellow	Black	Blue	Brown	Green	Orange	Red	White	Yellow	Fluorescent Yellow-Green	Fluorescent Pink
Regulatory	X		X	X		X					X	X			
Prohibitive			X	X							X	X			
Permissive		X										X			
Warning	X												X		
Pedestrian	X												X	X	
Bicycle	X												X	X	
Guide				X					X						
Interstate Route				X			X			X					
State Route	X											X			
US Route	X											X			
County Route					X		X								
Forest Route				X				X							
Street Name				X					X						
Destination				X					X						
Reference Location				X					X						
Information				X			X		X						
Evacuation Route				X			X								
Road User Service				X			X								
Recreational				X				X	X						
Temporary Traffic Control	X									X					
Incident Management	X									X					X
Changeable Message Signs *				X	X	X									
School	X												X	X	

\* Reverse colors or fluorescent yellow-green pixels may also be used on changeable message signs

The “Standard Highway Sign Designs for Texas” book (see Section 1A.11) prescribes design details for up to five different sizes depending on the type of traffic facility, including bikeways. Smaller sizes are designed to be used on bikeways and some other off-road applications. Larger sizes are designed for use on freeways and expressways, and can also be used to enhance road user safety and convenience on other facilities, especially on multi-lane divided highways and on undivided highways having five or more lanes of traffic and/or high speeds. The intermediate sizes are designed to be used on other highway types.

**Standard:**

The sign dimensions prescribed in this Manual and in the “Standard Highway Sign Designs for Texas” book shall be used unless engineering judgment determines that other sizes are appropriate. Where engineering judgment determines that sizes smaller than the prescribed dimensions are appropriate for use, the sign dimensions shall not be less than the minimum dimensions specified in this Manual. Where engineering judgment determines that sizes larger than the prescribed dimensions are appropriate for use, standard shapes and colors shall be used and standard proportions shall be retained as much as practical.

**Guidance:**

Increases above the prescribed sizes should be used where greater legibility or emphasis is needed. Wherever practical, the overall sign dimensions should be increased in 6 inch increments.

### **Section 2A.13 Symbols**

#### **Support:**

Sometimes a change from word messages to symbols requires significant time for public education and transition. Therefore, this Manual includes the practice of using educational plaques to accompany some new symbol signs.

#### **Standard:**

**Symbol designs shall in all cases be unmistakably similar to those shown in this Manual and in the “Standard Highway Sign Designs for Texas” book (see Section 1A.11). New symbol designs shall be adopted by the Federal Highway Administration based on research evaluations to determine road user comprehension, sign conspicuity, and sign legibility.**

#### **Guidance:**

New warning or regulatory symbol signs not readily recognizable by the public should be accompanied by an educational plaque.

#### **Option:**

State and/or local highway agencies may conduct research studies to determine road user comprehension, sign conspicuity, and sign legibility.

Educational plaques may be left in place as long as they are in serviceable condition.

Although most standard symbols are oriented facing left, mirror images of these symbols may be used where the reverse orientation might better convey to road users a direction of movement.

### **Section 2A.14 Word Messages**

#### **Standard:**

**Except as noted in Section 2A.06, all word messages shall use standard wording and letters as shown in this Manual and in the “Standard Highway Sign Designs for Texas” book (see Section 1A.11).**

#### **Guidance:**

Word messages should be as brief as possible and the lettering should be large enough to provide the necessary legibility distance. A minimum specific ratio, such as 1 inch of letter height per 40 ft. of legibility distance, should be used.

#### **Support:**

Some research indicates that a ratio of 1 inch of letter height per 33 ft. of legibility distance could be beneficial.

#### **Guidance:**

Abbreviations (see Section 1A.14) should be kept to a minimum, and should include only those that are commonly recognized and understood, such as AVE (for Avenue), BLVD (for Boulevard), N (for North), or JCT (for Junction).

#### **Standard:**

**All sign lettering shall be in capital letters as provided in the “Standard Highway Sign Designs for Texas” book, except as indicated in the Option below.**

#### **Option:**

Word messages on street name signs and destinations on guide signs may be composed of a combination of lower-case letters with initial upper-case letters.

### **Section 2A.15 Sign Borders**

#### **Standard:**

**Unless specifically stated otherwise, each sign illustrated herein shall have a border of the same color as the legend, at or just inside the edge.**

**The corners of all sign borders shall be rounded, except for STOP signs.**

#### **Guidance:**

A dark border on a light background should be set in from the edge, while a light border on a dark background should extend to the edge of the panel. A border for 30 inch signs with a light background should be from 0.5 to 0.75 inch in width, 0.5 inch from the edge. For similar signs with a light border, a width of 1 inch should be used. For other sizes, the border width should be of similar proportions, but should not exceed the

stroke-width of the major lettering of the sign. On signs exceeding 72 x 120 inches in size, the border should be 2 inches wide, or on larger signs, 3 inches wide. Except for STOP signs and as otherwise provided in Section 2E.15, the corners of the sign should be rounded to fit the border.

### **Section 2A.16 Standardization of Location**

Support:

Standardization of position cannot always be attained in practice. Examples of heights and lateral locations of signs for typical installations are illustrated in Figure 2A-1, and examples of locations for some typical signs at intersections are illustrated in Figure 2A-2.

**Standard:**

**Signs requiring different decisions by the road user shall be spaced sufficiently far apart for the required decisions to be made reasonably safely. One of the factors considered when determining the appropriate spacing shall be the posted speed.**

Guidance:

Signs should be located on the right side of the roadway where they are easily recognized and understood by road users. Signs in other locations should be considered only as supplementary to signs in the normal locations, except as otherwise indicated.

Signs should be individually installed on separate posts or mountings except where:

- A. One sign supplements another, or
- B. Route or directional signs are grouped to clarify information to motorists, or
- C. Regulatory signs that do not conflict with each other are grouped, such as turn prohibition signs posted with one-way signs, street name signs posted with a stop or yield sign, or a parking regulation sign posted with a speed limit sign.

Signs should be located so that they:

- A. Are outside the clear zone unless placed on a breakaway or yielding support (see Section 2A.19);
- B. Optimize nighttime visibility;
- C. Minimize the effects of mud splatter and debris;
- D. Do not obscure each other; and
- E. Are not hidden from view.

Support:

The clear zone is the total roadside border area, starting at the edge of the traveled way, available for use by errant vehicles. The width of the clear zone is dependent upon traffic volumes, speeds, and roadside geometry. Additional information can be found in the "AASHTO Roadside Design Guide" (see Page i for AASHTO's address).

Guidance:

With the increase in traffic volumes and the desire to provide road users regulatory, warning, and guidance information, an order of priority for sign installation should be established.

Support:

An order of priority is especially critical where space is limited for sign installation and there is a demand for several different types of signs. Overloading road users with too much information is not desirable.

Guidance:

Because regulatory and warning information is more critical to the road user than guidance information, regulatory and warning signing whose location is critical should be displayed rather than guide signing in cases where conflicts occur. Information of a less critical nature should be moved to less critical locations or omitted.


Option:

Under some circumstances, such as on curves to the right, signs may be placed on median islands or on the left side of the road. A supplementary sign located on the left of the roadway may be used on a multi-lane road where traffic in the right lane might obstruct the view to the right.

Guidance:


In urban areas where crosswalks exist, signs should not be placed within 4 ft. in advance of the crosswalk.

**Figure 2A-1. Examples of Heights and Lateral Locations of Signs for Typical Installations**

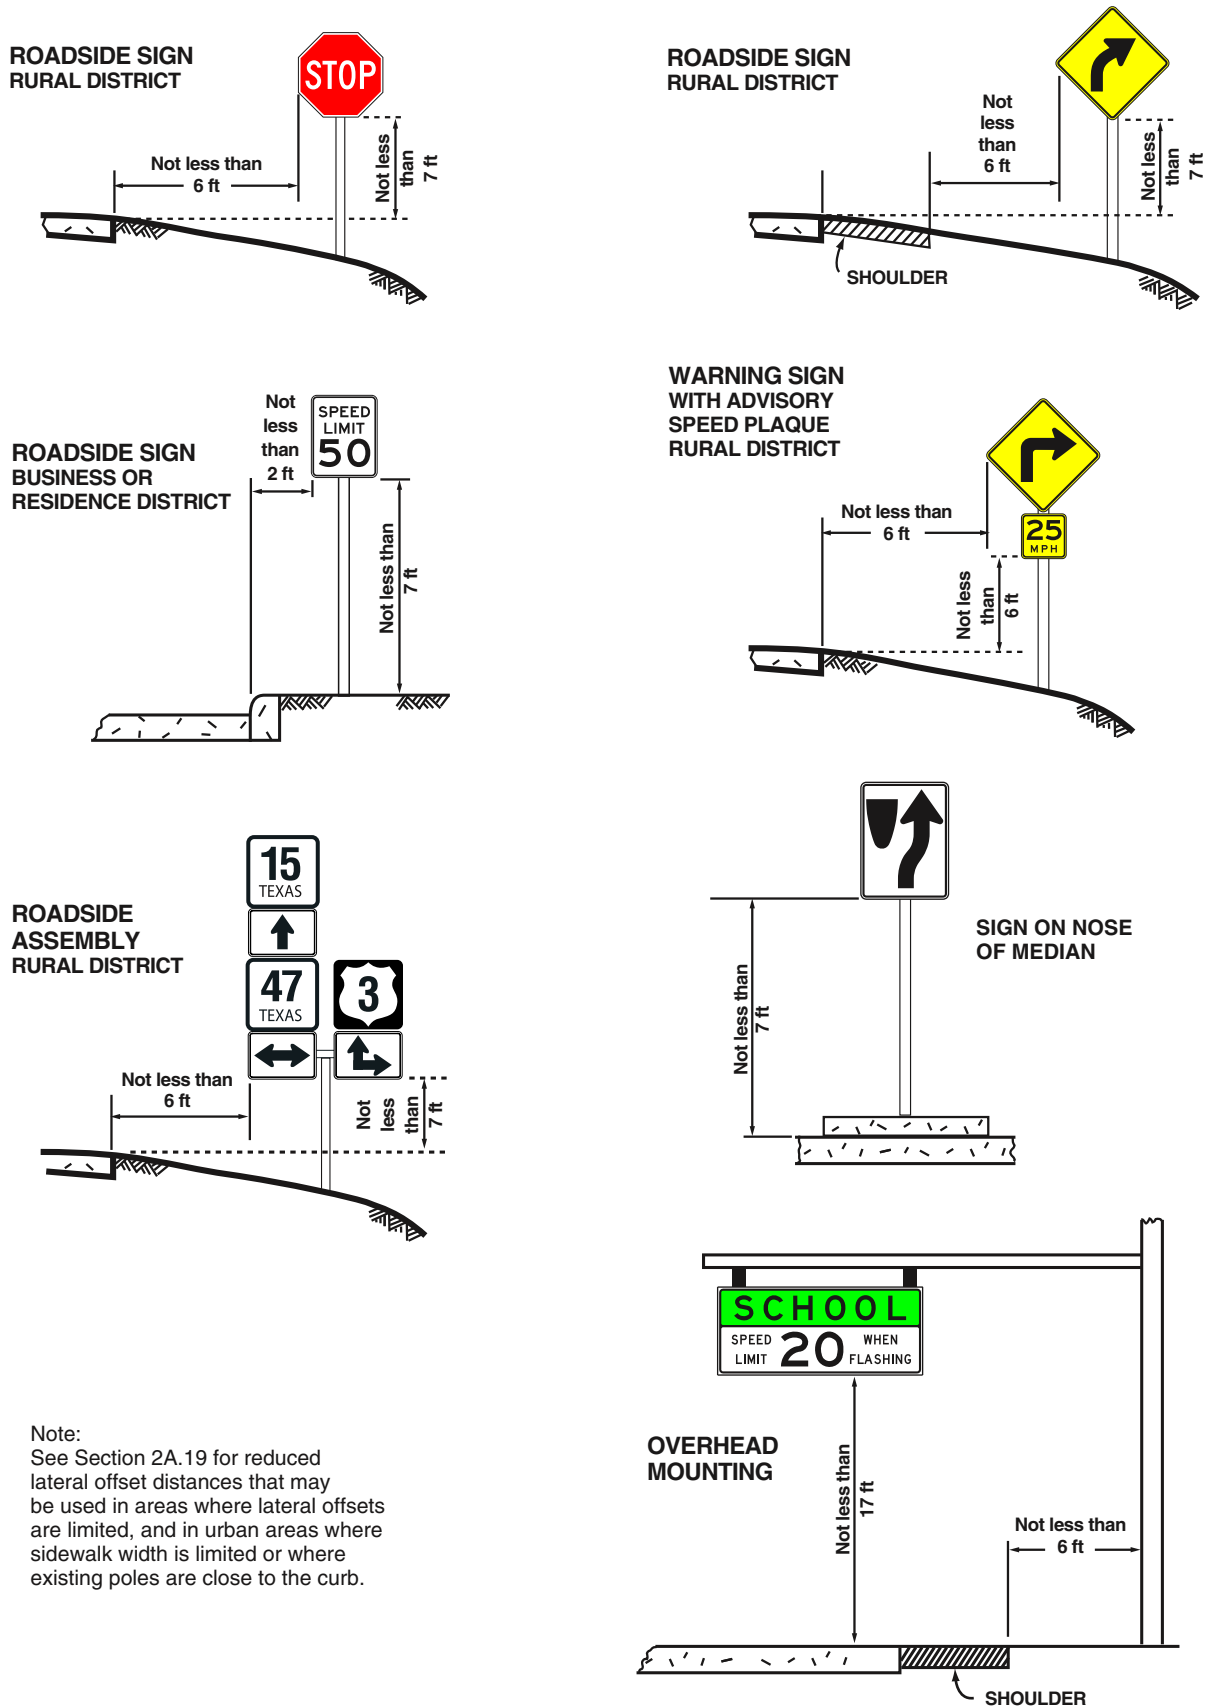

Note:  
See Section 2A.19 for reduced lateral offset distances that may be used in areas where lateral offsets are limited, and in urban areas where sidewalk width is limited or where existing poles are close to the curb.

**Figure 2A-2. Examples of Locations for Some Typical Signs at Intersections**

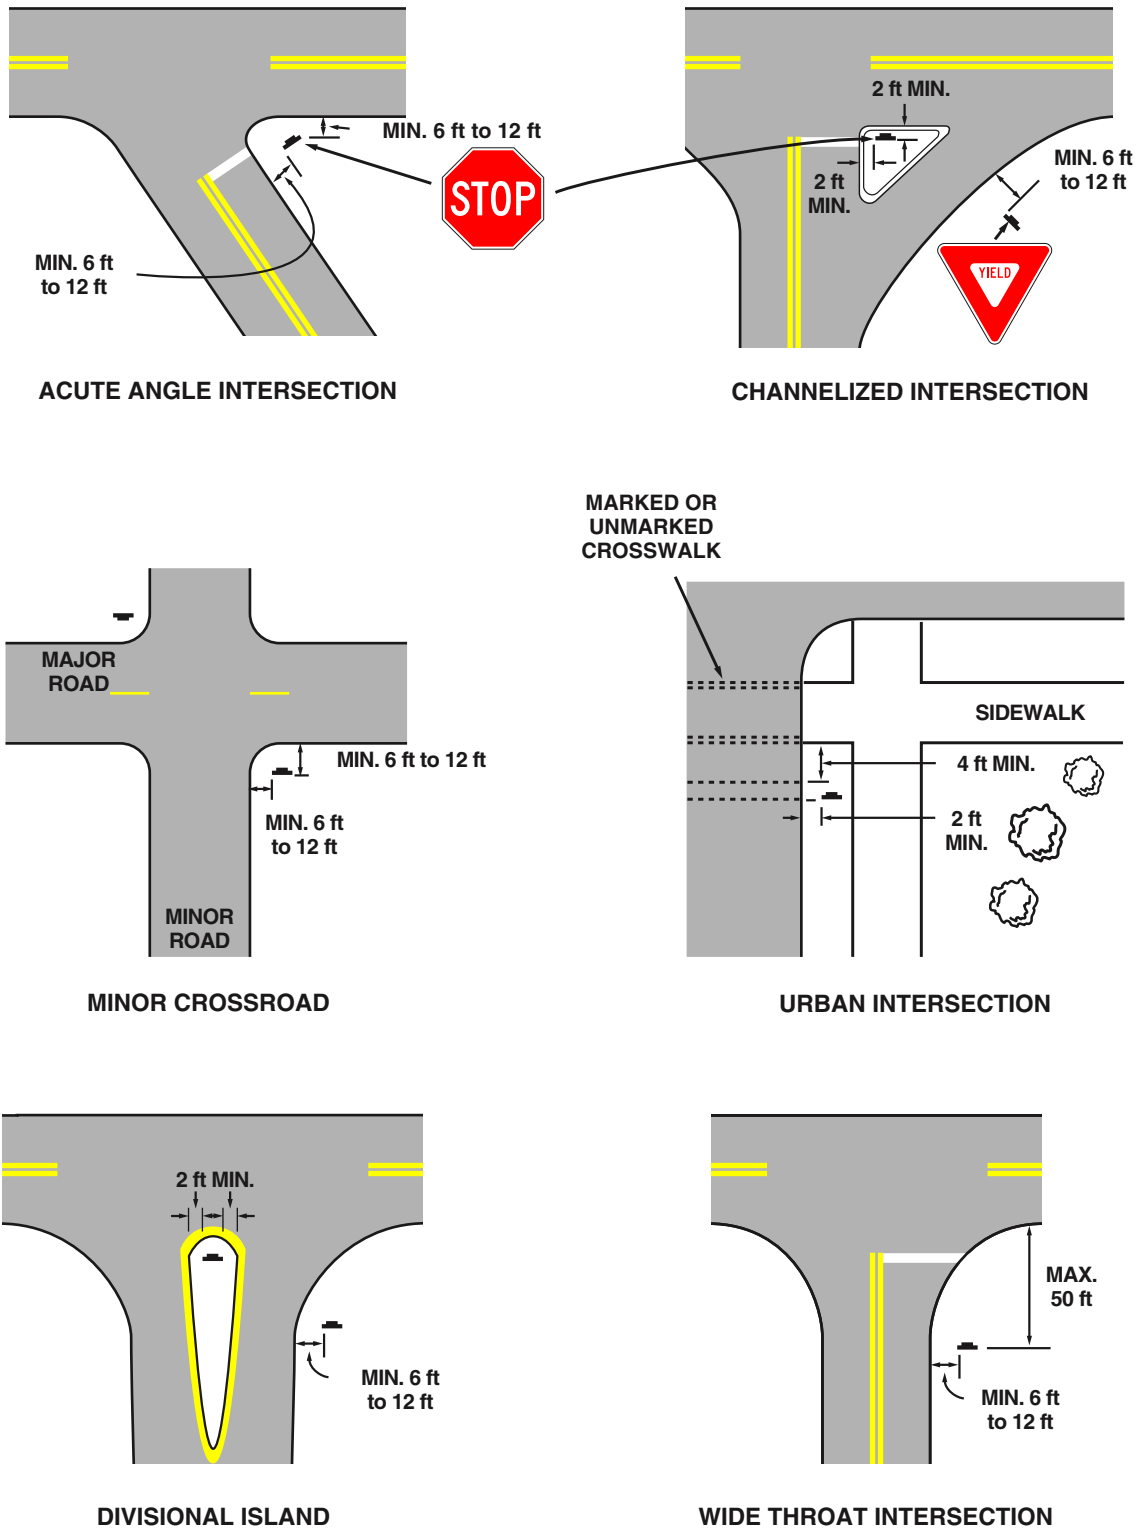

Note: Lateral offset is a minimum of 6 ft measured from the edge of the shoulder, or 12 ft measured from the edge of the traveled way. See Section 2A.19 for lower minimums that may be used in urban areas, or where lateral offset space is limited.

### **Section 2A.17 Overhead Sign Installations**

#### Guidance:

Overhead signs should be used on freeways and expressways, at locations where some degree of lane-use control is desirable, and at locations where space is not available at the roadside.

#### Support:

The operational requirements of the present highway system are such that overhead signs have value at many locations. The factors to be considered for the installation of overhead sign displays are not definable in specific numerical terms.

#### Option:

The following conditions (not in priority order) may be considered in an engineering study to determine if overhead signs would be beneficial:

- A. Traffic volume at or near capacity;
- B. Complex interchange design;
- C. Three or more lanes in each direction;
- D. Restricted sight distance;
- E. Closely spaced interchanges;
- F. Multi-lane exits;
- G. Large percentage of trucks;
- H. Street lighting background;
- I. High-speed traffic;
- J. Consistency of sign message location through a series of interchanges;
- K. Insufficient space for ground-mounted signs;
- L. Junction of two freeways; and
- M. Left exit ramps.

Over-crossing structures may serve for the support of overhead signs, and under some circumstances, may be the only practical solution that will provide adequate viewing distance. Use of such structures as sign supports may eliminate the need for the foundations and sign supports along the roadside.

### **Section 2A.18 Mounting Height**

#### Support:

The provisions of this Section apply unless specifically stated otherwise for a particular sign elsewhere in this Manual.

#### Standard:

**Signs installed at the side of the road in rural districts shall be at least 7 ft., measured from the bottom of the sign to the near edge of the pavement.**

**Where parking or pedestrian movements occur, the clearance to the bottom of the sign shall be at least 7 ft.**

**Directional signs on freeways and expressways shall be installed with a minimum height of 7 ft. All route signs, warning signs, and regulatory signs on freeways and expressways shall be at least 7 ft. above the level of the pavement edge.**

#### Option:

The height to the bottom of a plaque mounted below a sign may be 1 ft. less than the height specified above.

Where signs are placed 30 ft. or more from the edge of the traveled way, the height to the bottom of such signs may be 5 ft. above the level of the pavement edge.

A route sign assembly consisting of a route sign and auxiliary signs (see Section 2D.27) may be treated as a single sign for the purposes of this Section.

The mounting height may be adjusted when supports are located near the edge of the right-of-way on a steep backslope.

#### Support:

Without this flexibility regarding steep backslopes, some agencies might decide to relocate the sign closer to the road, which might be less desirable.

**Standard:**

**Overhead mounted signs shall provide a vertical clearance of not less than 17 ft. 6 in. to the sign, light fixture, or sign bridge, over the entire width of the pavement and shoulders except where a lesser vertical clearance is used for the design of other structures.**

**Option:**

If the vertical clearance of other structures is less than 16 ft., the vertical clearance to overhead sign structures or supports may be as low as 1 ft. higher than the vertical clearance of the other structures.

In special cases it may be necessary to reduce the clearance to overhead signs because of substandard dimensions in tunnels and other major structures such as double-deck bridges.

**Support:**

Figure 2A-1 illustrates some examples of the mounting height requirements contained in this Section.

**Section 2A.19 Lateral Offset****Standard:**

**For overhead sign supports, the minimum lateral offset from the edge of the shoulder (or if no shoulder exists, from the edge of the pavement) to the near edge of overhead sign supports (cantilever or sign bridges) shall be 6 ft. Overhead sign supports shall have a barrier or crash cushion to shield them if they are within the clear zone.**

**Ground-mounted sign supports shall be crashworthy or shielded with a longitudinal barrier or crash cushion if within the clear zone.**

**Guidance:**

For ground-mounted signs, the minimum lateral offset should be 12 ft. from the edge of the traveled way. If a shoulder wider than 6 ft. exists, the minimum lateral offset for ground-mounted signs should be 6 ft. from the edge of the shoulder.

**Support:**

The minimum lateral offset is intended to keep trucks and cars that use the shoulders from striking the signs or supports.

**Guidance:**

All supports should be located as far as practical from the edge of the shoulder. Advantage should be taken to place signs behind existing roadside barriers, on over-crossing structures, or other locations that minimize the exposure of the traffic to sign supports.

**Option:**

Where permitted, signs may be placed on existing supports used for other purposes, such as highway traffic signal supports, highway lighting supports, and utility poles.

**Standard:**

**If signs are placed on existing supports, they shall meet other placement criteria contained in this Manual.**

**Option:**

Lesser lateral offsets may be used on connecting roadways or ramps at interchanges, but not less than 6 ft. from the edge of the traveled way.

In areas where lateral offsets are limited, a minimum lateral offset of 2 ft. may be used.

A minimum offset of 1 ft. from the face of the curb may be used in urban areas where sidewalk width is limited or where existing poles are close to the curb.

**Support:**

Figures 2A-1 and 2A-2 illustrate some examples of the lateral offset requirements contained in this Section.

**Section 2A.20 Orientation****Guidance:**

Unless otherwise stated in this Manual, signs should be vertically mounted at right angles to the direction of, and facing, the traffic that they are intended to serve.

Where mirror reflection from the sign face is encountered to such a degree as to reduce legibility, the sign should be turned slightly away from the road. Signs that are placed 30 ft. or more from the pavement edge should be turned toward the road. On curved alignments, the angle of placement should be determined by the

direction of approaching traffic rather than by the roadway edge at the point where the sign is located.

Option:

On grades, sign faces may be tilted forward or back from the vertical position to improve the viewing angle.

### **Section 2A.21 Posts and Mountings**

**Standard:**

**Sign posts, foundations, and mountings shall be so constructed as to hold signs in a proper and permanent position, and to resist swaying in the wind or displacement by vandalism. Ground mounted sign supports shall be crashworthy or be shielded.**

Support:

The latest edition of AASHTO's "Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals" contains additional information regarding posts and mounting (see Page i for AASHTO's address).

Option:

Where engineering judgment indicates a need to draw attention to the sign during nighttime conditions, a strip of retroreflective material may be used on regulatory and warning sign supports.

**Standard:**

**If used, it shall be at least 2 inches in width, oriented in the same direction as the sign, and shall be placed for the full length of the support from the sign to within 2 ft. above the edge of the roadway. The color shall match the background color of the sign, except for the YIELD, DO NOT ENTER, WRONG WAY and STOP signs, it shall be red.**

Option:

A strip of retroreflective material may be used on sign supports to omni-directionally identify the support as a roadway object.

**Standard:**

**If used, it shall be 12 inches in height, visible in all directions and shall be placed approximately 4 ft. above the edge of the roadway. The color shall be yellow, except for the YIELD and STOP signs, it shall be red.**

### **Section 2A.22 Maintenance**

Guidance:

All traffic signs should be kept properly positioned, and legible, and should have adequate retroreflectivity (see Section 2A.09). Damaged or deteriorated signs should be replaced.

To assure adequate maintenance, a schedule for inspecting (both day and night), and replacing signs should be established. Employees of highway, law enforcement, and other public agencies whose duties require that they travel on the roadways should be encouraged to report any damaged, deteriorated, or obscured signs at the first opportunity.

Steps should be taken to see that weeds, trees, shrubbery, and construction, maintenance, and utility materials and equipment do not obscure the face of any sign.

A regular schedule of replacement of lighting elements for illuminated signs should be maintained.

### **Section 2A.23 Median Opening Treatments for Divided Highways with Wide Medians**

Guidance:

Where divided highways are separated by median widths at the median opening itself of 30 ft. or more, median openings should be signed as two separate intersections.

